

220V - 240V AC



Approval Marks



GMA-512606

Certified

EN 61347-1:2015
EN 61347-2-13:2014/A1:2017
EN 62384:2006 /A1:2009

Electronic


Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage		220	230	240	Vac
I/P Voltage Range		198	-	264	Vac
Input Frequency		47	50-60	63	Hz
Input Current(Iin)	@230VAC,50Hz,Full load	-	165	-	mA
Efficiency	@230VAC,50Hz,Full load	-	83	-	%
Power Factor	@230VAC,50Hz,Full load	-	0.9C	-	-
THD	@230VAC,50Hz,Full load	-	20	-	%
Output Current(Iout)	±10% @25°C	0	-	1250	mA
Output Voltage(Vout)		-	24	-	Vdc
Output Power(Pout)		0	-	30	W
Protection	Overload Protection	Auto recovery			
	Open-circuit Protection	Max output voltage at no load			
	Short-circuit Protection	Latch			
RoHS Standard		Compliant			
Surge	L , N	-	1	-	KV
IP		-	20	-	-
Ambient Temp.		-20	-	50	°C
Case Temp. (Tc)		-	75	-	°C
Operation Humidity	No condensation	10	-	90	%
Storage Temperature		-25	-	85	°C
Storage Humidity	No condensation	10	-	95	%
Lifetime	@Ta max		50,000		hrs
Dimension	L x W x H	235	30	21	mm

Lamp Type CV LED strip or module 24V

Application Space

Indoor Use
(Low Humidity, No Condensation)

220V - 240V AC

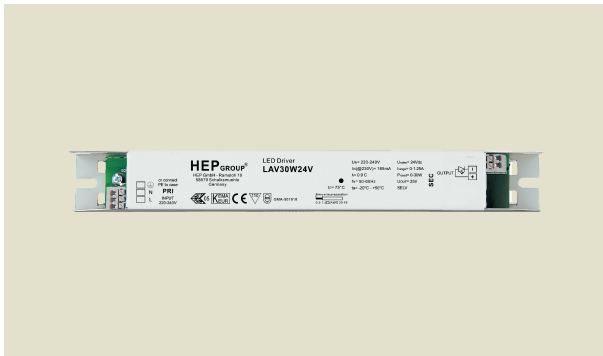

Approval Marks




GMA-512606

Certified

EN 61347-1:2015
EN 61347-2-13:2014/A1:2017
EN 62384:2006 /A1:2009

**Physical
Parameter**

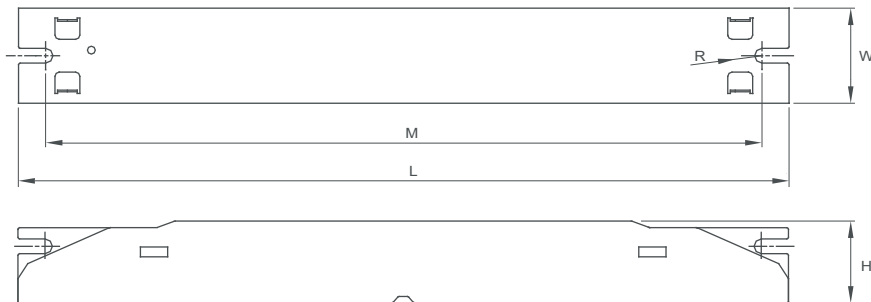

L : 235 mm H : 21 mm
M : 218.5 mm R : 1.30 mm
W : 30 mm Slot On One Side Allowing Alignment : M $\pm$ 3 mm
Tolerance : $\geq 0 \sim 100 \geq \pm 0.5$ mm
 100 $\sim \geq \pm 1$ mm
Terminal Block : Push - Button, Angled Entry
Housing Material : Metal, No Sharp Edges
Soldering : Lead - Free, Comply With RoHS
Label : Surface Print

Wiring Diagram

