



Approval Marks



GMA-519265 (for 150/250/350/500mA)

	Item	Value	Remark
Input	Nominal voltage	220–240V	
	Nominal frequency	50–60Hz	
	AC voltage range	198–264V	
	DC voltage range (start)	N/A	
	DC voltage range (operation)	N/A	
	Nominal current	45mA	Full load @230VAC
	Total Harmonic Distortion (THD)	< 21%	Full load @230VAC
	Power factor		
	G6LT7W150/180/350/500LR-Z	0.9C-0.95	Min-load @240Vac and Full-load @220 Vac
	G6LT7W250LR-Z	0.8C-0.95	Min-load @240Vac and Full-load @220 Vac
	Displacement factor	0.8C-0.95	Full load @230VAC
	Efficiency		
	G6LT7W150/180LR-Z	76%(Typ.)	Full load @230VAC
	G6LT7W250LR-Z	76%(Typ.)	Full load @230VAC
	G6LT7W350LR-Z	75%(Typ.)	Full load @230VAC
	G6LT7W500LR-Z	72%(Typ.)	Full load @230VAC
	No-load power	NA	
	Stand-by power	NA	
	Protection class	II	Suitable for II luminaires
	Inrush current	1A / 60us	
	Max.units per circuit breaker	Type B , 10A MCB	89
		Type B , 16A MCB	142
		Type C , 10A MCB	111
		Type C , 16A MCB	178
	Earth leakage current	NA	
Output	Nominal voltage range		
	G6LT7W150LR-Z	30-42 Vdc	
	G6LT7W180LR-Z	27-42Vdc	
	G6LT7W250LR-Z	12-21Vdc	
	G6LT7W350LR-Z	12-21Vdc	
	G6LT7W500LR-Z	9-14 Vdc	

	Item	Value	Remark
Output	Maximum voltage		
	G6LT7W150/180LR-Z	55Vdc	
	G6LT7W250LR-Z	35Vdc	
	G6LT7W350LR-Z	35Vdc	
	G6LT7W500LR-Z	25Vdc	
	Nominal current range		Full load @230VAC
	G6LT7W150LR-Z	150mA	
	G6LT7W180LR-Z	180mA	
	G6LT7W250LR-Z	250mA	
	G6LT7W350LR-Z	350mA	
	G6LT7W500LR-Z	500mA	
	Current accuracy		Full load @230VAC
	G6LT7W150/180LR-Z	± 10%	
	G6LT7W250/350/500LR-Z	± 5%	
	Typical output LF current ripple	± 5%	Low Frequency< 120Hz Full load @230VAC
	Starting time	< 0.5 S	Full load @230VAC
	SVM	≤ 0.4	Full load @230VAC
	P _{stLM}	≤ 1	Full load @230VAC
	Nominal power range		
	G6LT7W150LR-Z	4.5-6.3W	
Dimming	G6LT7W180LR-Z	4.9-7.5W	
	G6LT7W250LR-Z	3.0-5.25W	
	G6LT7W350LR-Z	4.2-7.4W	
	G6LT7W500LR-Z	4.5-7.0W	
	Maximum power	7.5W	
	Dimming control	Trailing Edge	
Environment	Dimming technique	Amplitude	
	PWM frequency	NA	
	Dimming range	10-100%	
	Lowest dimming current	10%	
	Galvanic isolation	NA	
	Ambient temperature range t _a	-20°C - +50°C	
Packing	Maximum case temperature t _c	80°C	
	Max. case temp. in fault condition	110°C	When operating under fault conditions, the temperature of the enclosure at any location should not exceed 110 °C.
	Storage temperature range	-25°C - +85°C	
	Relative humidity	10% - 90%	
	Surge transient protection	1 kV	L/N
	Environmental rating	Indoor	
	IP rating	IP20	
	Mains switching cycles	> 100,000	
	Expected lifetime	> 50,000 h, tc 80 °C @ ta 50 °C > 100,000 h, tc 70 °C @ ta 40 °C	0.2 % / 1,000 h failure rate 0.1 % / 1,000 h failure rate
	Gross weight/box	14.8 kg	
Packing	Net weight/box	13.4 kg	
	Pcs/box	224 PCS	
	Dimension/box	385(L)*310(W)*260(H)mm	

Protections

Short-circuit Protection	Auto recovery
Open-circuit Protection	Auto recovery
Overload Protection	Auto recovery

Conformity & Standards

Safety:	EN 61347-1, EN 61347-2-13, EN 62493
Performance:	EN 62384
EMC standard:	EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61547

Cable information

PRI

Cable cross-section	0.75-1.5□/AWG 18-16
Stripping	6mm
Pull test cable type	H03VV(H2)-F 2x0,75-1,0 mm ²

SEC

Cable cross-section	0.5-1.5□/AWG 20-16
Stripping	6mm

Terminal information

PRI-Screw type

SEC-Screw type





Subject to change without notice, HEP guarantees all products perform functionally well

* If not mentioned, all the test conditions are based on full load at 230VAC input (for 220-240 VAC input).


Trailing Edge Dimmer list approved by HEP

Manufacturer	Model	Q'ty of parallelconnection
Philips	SED-200A	19
Merten/Schneider	SBD315RC	26
Etman	ETM327	29
Merten	SBD200LED	29
Busch	6513 U-102	29
Busch	6523 UR-103	29
Busch	6523 U-102	20
Niko	310-0190X	26
JUNG	LB-Management	29
CASAMBI	CBU-TED	11
eth	05-187975	12

G6LT7W180LRZ Only

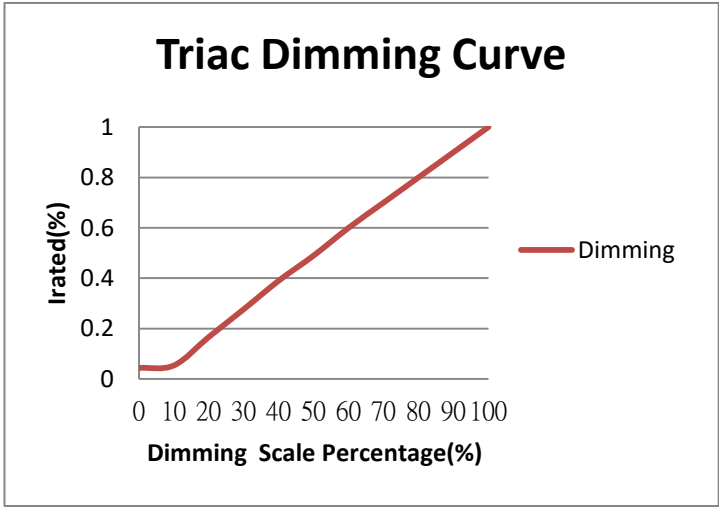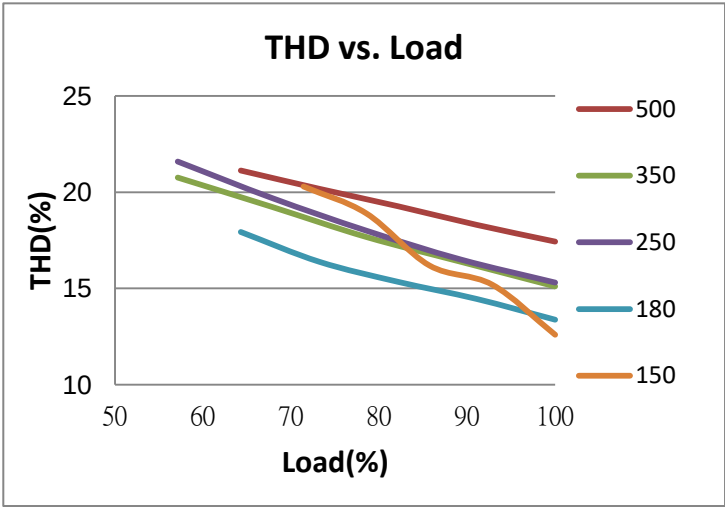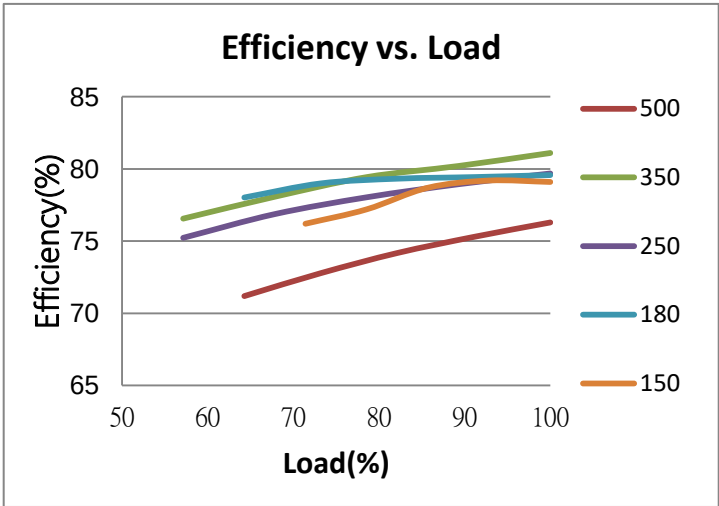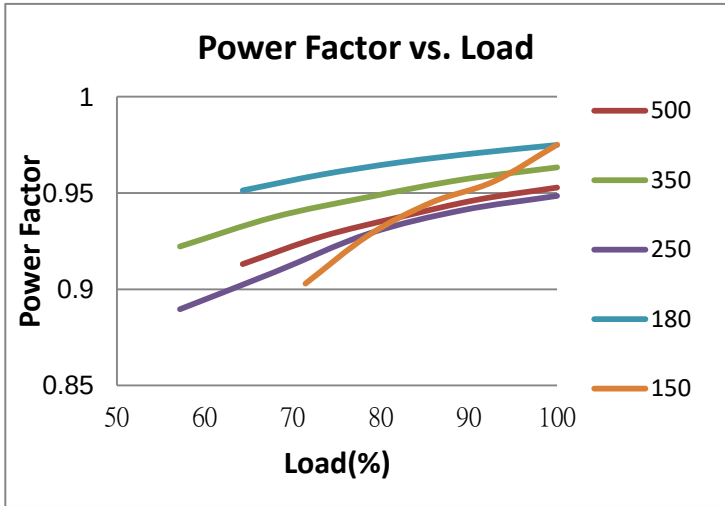

Physical
Parameter

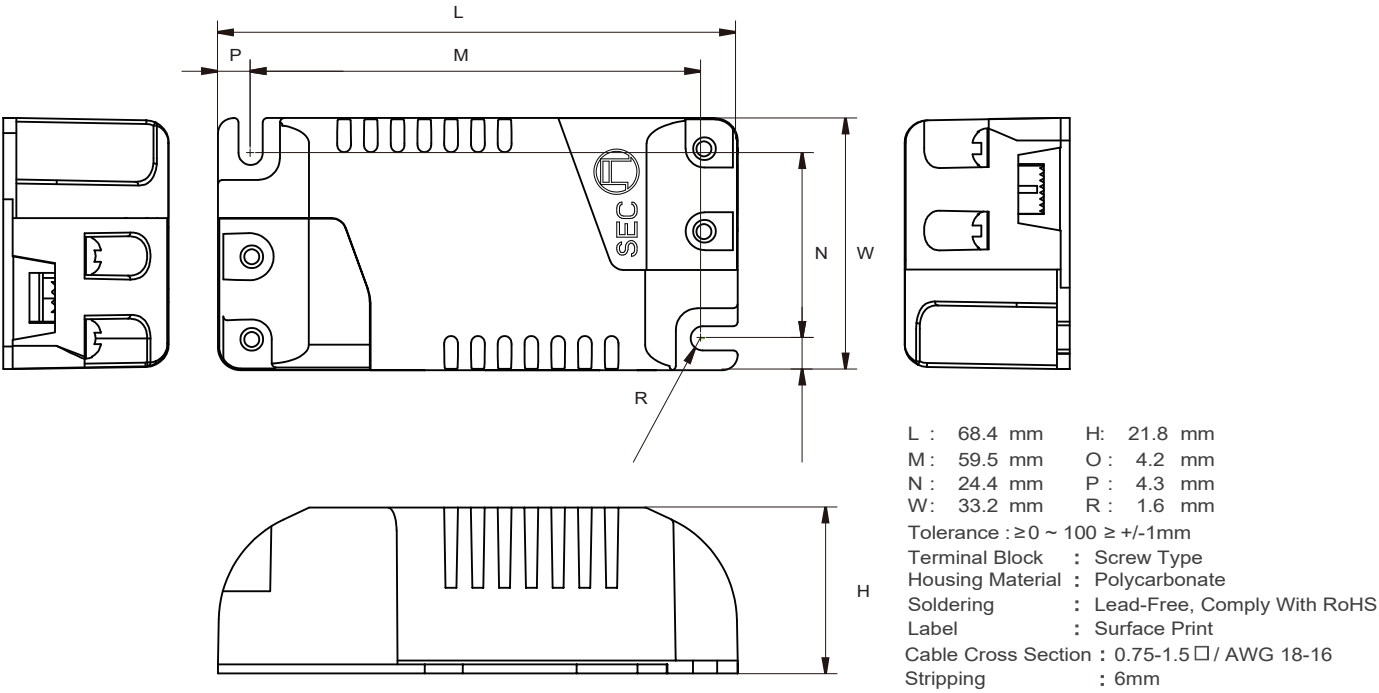

Wiring Diagram

