



		Item	Value	Remark
		Nominal voltage	220-240V	
		Nominal frequency	50-60Hz	
		AC voltage range	198-264V	
		DC voltage range (start)	NA	
		DC voltage range (operation)	NA	
		Nominal current		
		LNDC6W120LRP	25mA	
		LNDC6W150LRP	30mA	
		LNDC6W200LRP	40mA	
		LNDC6W250LRP	35mA	
		LNDC6W350LRP	45mA	
		Total Harmonic Distortion (THD)	< 30%	Full load @230VAC
		Power factor		Full load @230VAC
Input		LNDC6W120LRP	0.6-0.8C	
		LNDC6W150/250LRP	0.65-0.85C	
		LNDC6W200LRP	0.75-0.85C	
		LNDC6W350LRP	0.75-0.91C	
		Displacement factor		Full load @230VAC
		LNDC6W120LRP	0.6-0.8C	
		LNDC6W150/250LRP	0.65-0.85C	
		LNDC6W200LRP	0.75-0.85C	
		LNDC6W350LRP	0.75-0.91C	
		Efficiency	77% (Typ.)	Full load @230VAC
		No-load power	NA	
		Stand-by power	<0.5W	
		Protection class	NA	
		Inrush current	3.5 A / 30 μs	
		Type B , 10A MCB	89	
		Type B , 16A MCB	142	
		Type C , 10A MCB	111	
		Type C , 16A MCB	178	
		Max.units per circuit breaker		
		Touch current	< 0.7mA peak	IEC/EN 61347-1





	Item	Value	Remark
Output	Nominal voltage range		
	LNDC6W120/150/200LRP	15-30 Vdc	
	LNDC6W250/350LRP	13-19 Vdc	
	Maximum voltage		
	LNDC6W120/150/200LRP	40Vdc	
	LNDC6W250/350LRP	30Vdc	
	Nominal current range		
	LNDC6W120LRP	120mA	
	LNDC6W150LRP	150mA	
	LNDC6W200LRP	200mA	
	LNDC6W250LRP	250mA	
	LNDC6W350LRP	350mA	
	Current accuracy		
	LND6W350LRP	± 5%	
	LND6W120/150/200/250LRP	± 8%	
	Typical output LF current ripple	± 6%	Low Frequency< 120Hz Full load @230VAC
	Starting time	< 0.5 S	Full load @230VAC
	Nominal power range		
	LNDC6W120LRP	1.8-3.6W	
	LNDC6W150LRP	2.3-4.5W	
	LNDC6W200LRP	3.0-6.0W	
	LNDC6W250LRP	3.3-4.7W	
	LNDC6W350LRP	4.6-6.6W	
	Maximum power	6W	
Dimming	Dimming control	DALI/Touch Dim	
	Dimming technique	Amplitude	
	PWM frequency	NA	
	Dimming range	5-100%	
	Lowest dimming current	1-8%	
	Galvanic isolation	Basic insulated to PRI and double insulated to SEC	
Environment	Ambient temperature range t _a	-20°C - +50°C	
	Maximum case temperature t _c	70°C	
	Max. case temp. in fault condition	110°C	When operating under fault conditions, the temperature of the enclosure at any location should not exceed 110 °C.
	Storage temperature range	-40°C - +85°C	
	Relative humidity	10% - 95%	
	Surge transient protection	1 kV	L/N
	Environmental rating	Indoor	
	IP rating	IP20	
	Mains switching cycles	> 100,000	
	Expected lifetime	> 50,000 h, t _c 70 °C @ t _a 50 °C > 100000 h, t _c 60 °C @ t _a 40 °C	0.2 % / 1,000 h failure rate @ t _c 70 °C 0.1 % / 1,000 h failure rate @ t _c 60 °C
Packing	Gross weight/Carton	9.1 kg	
	Net weight/Carton	8.2 kg	
	Pcs/Carton	96 PCS	
	Dimension/Carton	395(L)*350(W)*215(H)mm	
Protections			
	Short-circuit Protection	Auto recovery	
	Open-circuit Protection	Auto recovery	
	Overload Protection	Auto recovery	

Conformity & Standards		
Safety standard:	EN 61347-1, EN 61347-2-13, EN 62493	
Performance:	EN 62384	
SAA standard:	AS/NZS 61347.1, AS/NZS IEC 61347.2.13	
CCC standard:	GB17625.1,GB/T17743,GB19510.1,GB19510.14	
EMC standard:	EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61547	
DALI protocol standard:	EN 62386-101, EN 62386-102, EN 62386-207	
Cable information		
PRI Connection	L	N
Color	Brown	Blue
Wire type	7022	7022
Wire diameter	AWG18	AWG18
Wire length	138mm	141mm
Stripping	6mm	6mm
Tolerance	±5mm	±5mm
Sec Connection	+	-
Color	Red	Black
Wire type	3385	3385
Wire diameter	AWG22	AWG22
Wire length	140mm	141mm
Stripping	6mm	6mm
Tolerance	±5mm	±5mm
DALI/Touch Dim Connection	DA	DA
Color	Purple	Gray
Wire type	7022	7022
Wire diameter	AWG20	AWG20
Wire length	131mm	134mm
Stripping	10mm	10mm
Tolerance	±5mm	±5mm


*Subject to change without notice, HEP guarantees all products perform functionally well

*If not mentioned, all the test conditions are based on full load at 230VAC input (for 220-240 VAC input).

Electrical Values

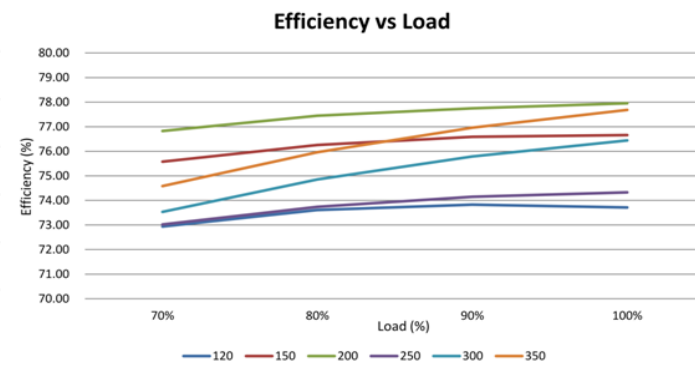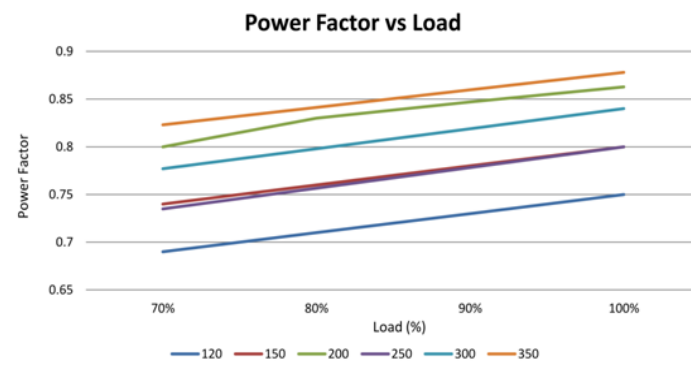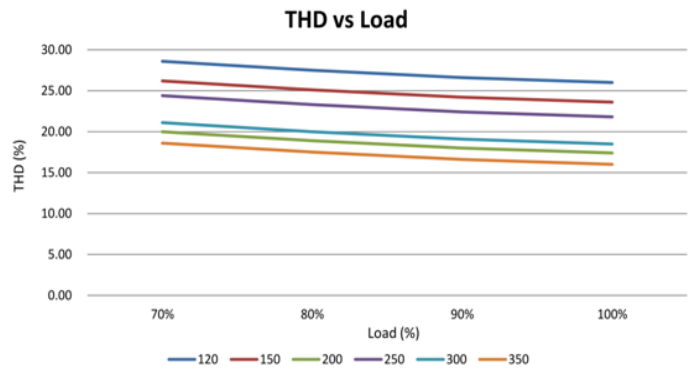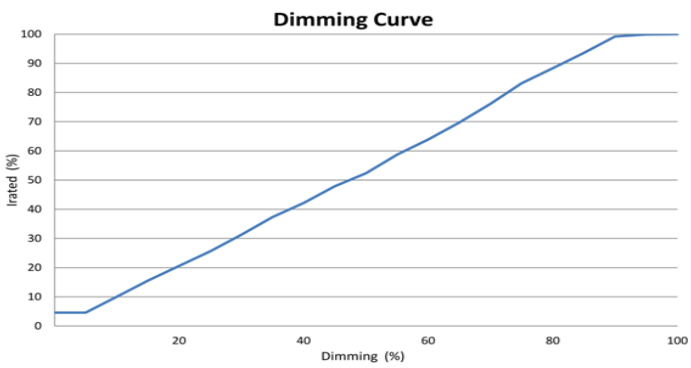

Physical Parameter

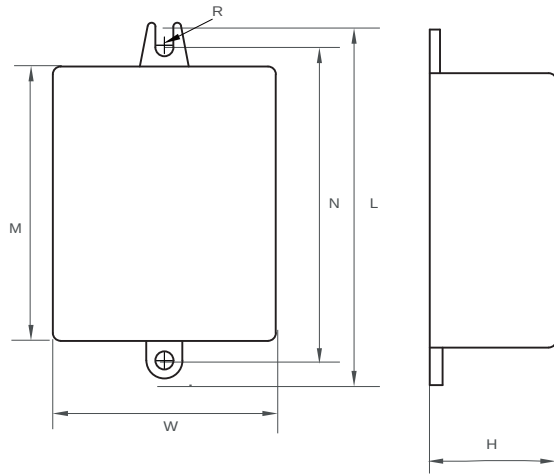

L : 69.3 mm W: 43.5 mm
M: 53.5 mm H: 24.6 mm
N: 61 mm R: 1.75 mm

Tolerance : +/-1 mm , R : +/-0.5 mm


Housing Material : Polycarbonate/Potting

Soldering : Lead-Free, Comply With RoHS


Label : Surface Print

Wiring Diagram

DALI

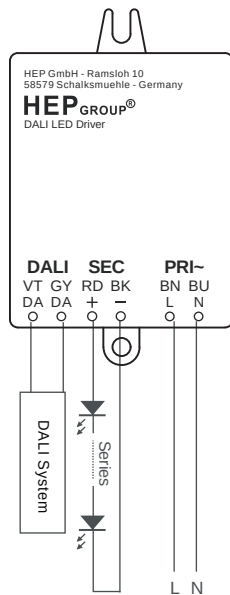

TOUCH DIM

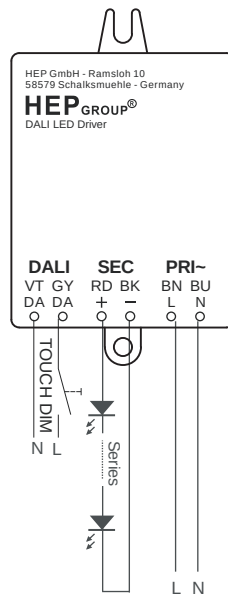

* Touch Dim

Short push (<0.6sec.)

Push to turn ON-OFF

Long push (>0.6sec.)

Dimming up or down

Synchronization of Touch DIM

If a large number of driver with Touch Dim is operated in a system

there is a chance that an driver will operate out of synchronization with the others(= different dimming level setting or different switching state).

Synchronism can be restored as follows:

1.Step: Long push

all the lamps are switched on

2.Step: Short push

all the lamps are switched off

3.Step: Long push

all the lamps are switched on the minimum dimming setting of the drivers and continuously fade up to the desired dimming level, then release push bottom.

Max. lead length : 20 M

Max. parallel units : 15 pcs